

TELESCRIPT

TELESCRIPT

TELESCRIPT

TELESCRIPT



Prompting for Professionals

TFT- LCD Prompting Displays That Are Simply Stunning...

Telescript's TSP Range of Colour TFT Prompting Displays

A streamlined but rugged new range of TFT colour prompting displays which are lightweight, portable and exceptionally bright. Flexibility and ease of use are of prime importance to our design concept. Therefore our superb range uses the very latest in TFT-LCD monitor technology for both Television production and conference presentations.

A choice of Telescript's on camera range is available in 8" - 13" - 15" and 20" (20, 33, 38 and 51cm) screen sizes.


Model: TSP- 8" Colour TFT On Camera Prompter

This very light weight portable prompter has a collapsible cloth hood for through the lens prompting and comes complete with a unique ultra lightweight Nylon mounting plate, thus reducing the weight.

The system weighs in at 4lb (2kg) and is ideal for use with an ENG style pan and tilt head / Tripod. Complete flexibility allows for both vertical and horizontal direction movement plus counterbalancing.

A 3" (75mm) camera riser mounting bracket is included for use with DV cameras.

Further options for above the lens mount for direct reading or Virtual studio requirement are also available for the TSB8.

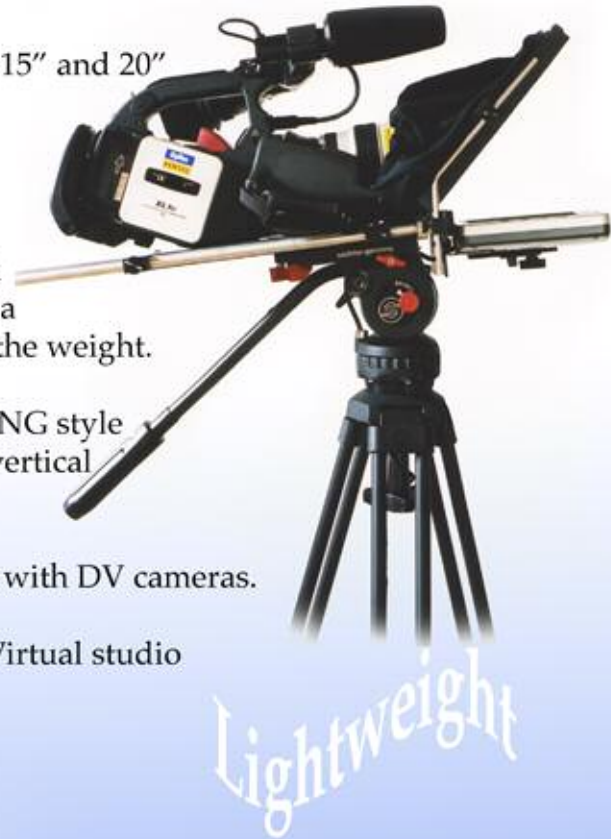

TECHNICAL SPECIFICATIONS:

Monitor Weight: 0.6lb (600g)

Monitor dimensions: 8 1/4" x 6 1/4" x 1 1/4" (209 x 159 x 32mm)

System Weight: 4lb (1.9kg)

Display size: 8" (20cm) TFT LCD

Input signal: PAL & NTSC (Auto switching)

Video inputs: 1 x composite, 1 volt P-P via BNC adaptor and 1 x S-video

DC Power Input: DC-12v-24 volt via 4 pin XLR connector

DC operating voltage range: DC 10v-30v

AC Power input: 220 volt AC 50/60Hz via 4 pin XLR connector

Power consumption: 10 Watt max

Contrast Ratio: 150 typical

Brightness: 350cd/m²

Image Reverse: Menu setting for either mirror image or direct reading

Glass: Dimensions 8 1/4" x 8 1/4" x 1/8" (210mm x 210mm x 3mm)

Remote control: The infrared remote control is credit card size and has the following controls:

Power switch - Menu display - Adjust image up/down

Model: TSP- 13" Colour TFT On Camera Prompter

This light weight prompter comes with a rigid glass hood assembly for through the lens prompting. The hood assembly is adjustable in both the vertical and horizontal direction and comes with a cloth light shield. The system includes an aluminium mounting plate for an ENG style pan and tilt head/Tripod and the plate incorporates two adjustable rods for counterbalancing the prompter on the head. If a DV camera is to be used, we recommend the use of our optional 3" (75mm) camera riser mounting bracket.

TECHNICAL SPECIFICATIONS:

Monitor Weight: 7.5lb (3.4kg)

Monitor dimensions: 13 3/8" x 12 1/4" x 2 3/8" (337 x 313 x 59mm)

System Weight: 16lb (7.4kg)

Display size: 13" (33cm) TFT LCD

Input signal: PAL, NTSC & SECAM

Video inputs: 1 x composite, 1 volt P-P via BNC adaptor and 1 x S-video

AC Power input: 110/220 volt AC 50/60Hz

Contrast Ratio: 500:1

Brightness: 430cd/m²

Viewing Angle: 170 degrees

Pixel Resolution: 640 x 3 x 480

Backlight Hours: 60,000 hours

Glass: Dimensions 13 3/4" x 13 3/4" (350 x 350 x 3mm) light transmission 85%

Remote control: Infrared remote control of all the controls via menu screen, including the setting for either a mirror image or direct reading monitor



Model: TSP- 15" Colour TFT On Camera Prompter

The prompter comes with a rigid glass hood assembly for through the lens prompting. The hood is adjustable in both the vertical and horizontal direction and comes complete with a cloth light shield. The system is supplied with an aluminium mounting plate for use with an ENG style pan and tilt head/Tripod. The plate incorporates two adjustable rods for counterbalancing the prompter on the head.

If a DV camera is to be used, we recommend the use of our optional 3" (75mm) camera riser mounting bracket.

TECHNICAL SPECIFICATIONS:

Monitor Weight: 8.8lb (4.kg)

Monitor dimensions: 13 7/8" x 14 7/8" x 2 3/8" (352 x 379 x 59mm)

System Weight: 18.5lb (8.5kg)

Display size: 15" (38.1cm) TFT LCD

Input signal: PAL, NTSC & SECAM

Video inputs: 1 x composite, 1 volt P-P via BNC adaptor and 1 x S-video

AC Power input: 220 volt AC 50/60Hz

Contrast Ratio: 500:1

Brightness: 430cd/m²

Viewing Angle: 170 degrees

Pixel Resolution: 640 x 3 x 480

Backlight Hours: 60,000 hours

Menu OSD Language: English, German, French, Spanish, Italian, Dutch & Swedish

Glass: Dimensions 15 3/4" x 15 3/4" x 1/8" (400 x 400x 3mm)

Remote control: Infrared remote control of all the controls via menu screen, including the setting for either a mirror image or direct reading monitor



Model: TSP- 20" Colour TFT On Camera Prompter

The largest display in our range comes complete with a rigid glass hood assembly for through the lens prompting and is the perfect display for use in News Production.

The hood is adjustable in both the vertical and horizontal direction and comes with a cloth light shield. An aluminium mounting plate for use with an ENG style pan and tilt head/Tripod is provided. The plate incorporates two adjustable rods for counterbalancing the prompter on the head. Also included is a 3" (75mm) camera riser mounting bracket, a counter balance weight and a steady bar bracket assembly.

TECHNICAL SPECIFICATIONS:

Monitor Weight: 15lb (6.9kg)

Monitor dimensions: 17 1/8" x 19 1/2" x 2 7/8" (435 x 493 x 68)

System Weight: 26lb (12kg)

Display size: 19.7" (51cm) TFT LCD

Input signal: PAL, NTSC & SECAM

Video inputs: 1 x composite, 1 volt P-P via BNC adaptor and 1 x S-video

AC Power input: 110-220 volt AC 50/60Hz

Contrast Ratio: 500:1

Brightness: 430cd/m²

Viewing Angle: 170 degrees

Pixel Resolution: 640 x 3 x 480

Backlight Hours: 60,000 hours

Menu OSD Language: English, German, French, Spanish, Italian, Dutch & Swedish

Glass: Dimensions 19 5/8" x 19 1/4 x 3/16" (500 x 490 x 4mm)

Remote control: Infrared remote control of all the controls via menu screen, including the setting for either a mirror image or direct reading monitor



TSP Range of Conference Prompters

The TFT range of monitor displays used in our Television prompters are also used for our conference systems. This very streamlined but rugged range of colour prompting displays which are exceptionally bright, very lightweight and very portable. Designed by experts for use in conference presentations, this superb product range uses the very latest in TFT monitor technology and are available in 8" - 13" -15" and 20" (20, 33, 38 and 51cm) screen sizes.

A superb range of TFT Conference prompters available in 8", 13", 15" and 20" screen sizes. Lightweight and

Model TSP-C Conference stand with Glass

This slim yet very sturdy black finished conference glass stand comes complete with a heavy cast iron base for stability and has non-slip rubber feet. The two stage conference stand comes complete with an adjustable glass holder and a sheet of conference glass which can be mounted either horizontally or vertically.

The height of the stand is fully adjustable and the minimum height to the bottom of the glass is 33 1/2" (85cm) and the maximum height is 61" (1.55 meters.) Base diameter: 9 7/8" (24.7cm).

The angle of the glass can also be manually adjusted by the speaker if required.

Conference glass dimensions: 12 3/4" x 9" x 1/8" (325 x 228 x 3mm)



Model: TSP- CD8" Colour TFT Direct Reading Prompter

This very discreet and compact 8" colour TFT colour monitor is extremely lightweight weighing just over 1/2 lb. (0.6g) which makes it the perfect direct reading prompter for use in Television productions, Awards Ceremonies or Conference presentations.

The 8" TFT monitor accepts both composite video and S-Video signals and the inputs can be switched using the credit card size infrared remote control. A perfect solution for conference presentations as it allows images to be viewed via the S-video port and then the ability to switch to the composite port, to view the prompter text.

The display is mounted on a black finished discrete telescopic stand which has a cast iron base for stability. The monitor can be adjusted for height and angle to give the presenter the perfect eye line. The monitor is mains powered but can be run from a DC supply if required.



TECHNICAL SPECIFICATIONS:

Monitor Weight: 0.6lb (600g)

Monitor dimensions: 8 1/4" x 6 1/4" x 1 1/4" (209 x 159 x 32mm)

System Weight: 4lb (1.9kg)

Display size: 8" (20cm) TFT LCD

Input signal: PAL & NTSC (Auto switching)

Video inputs: 1 x composite, 1 volt P-P via BNC adaptor and 1 x S-video

DC Power Input: DC-12v-24 volt via 4 pin XLR connector

DC operating voltage range: DC 10v-30v

AC Power input: 220 volt AC 50/60Hz via 4 pin XLR connector

Power consumption: 10 Watt max

Contrast Ratio: 150 typical

Brightness: 350cd/m²

Image Reverse: Menu setting for either mirror image or direct reading

Remote control: The infrared remote control is credit card size and has the following controls:

Power switch - Menu display - Adjust image up/down

Accessories

Flight cases, 6 x composite output Video Distribution Amplifiers, Portable 12 volt dc power packs

Floor stand for on camera prompter, Spare Glass for Television and Conferences

Red Cue light (Tally light)



Take the Weight off your Legs....

Our Prompting Software

TeleScriptAV™ is Telescript's newest prompting software that opens the door to the world of International prompting. Full Unicode compliance means you can prompt in all world languages (international character sets), and localised versions are available in a number of these languages - so menus, dialogs and help files are in your native tongue. Scrolling can be controlled directly with your mouse or trackball, or externally with Telescript's 10-button serial hand control.


TeleScriptAV works with industry standard hardware and no special proprietary cards are required. For corporate video, staging events, field production, or academic use, TeleScriptAV is the most cost-effective, portable and flexible software package for your teleprompting needs.

Features

- 10 Minute Learning Curve
- Uses RTF File Format
- Familiar and Efficient User Interface
- Full Screen, Point and Click Editing
- Full Rich Text Formatting
- Unique Text Zooming
- Variable Font Size, Colour & Style
- Bookmarks, Find and Replace, Spell Check
- Cut, Copy, Paste

Languages

- Prompt in All International Character Sets
- Fully Unicode compliant in Windows 2000/XP
- Versions available in localised languages

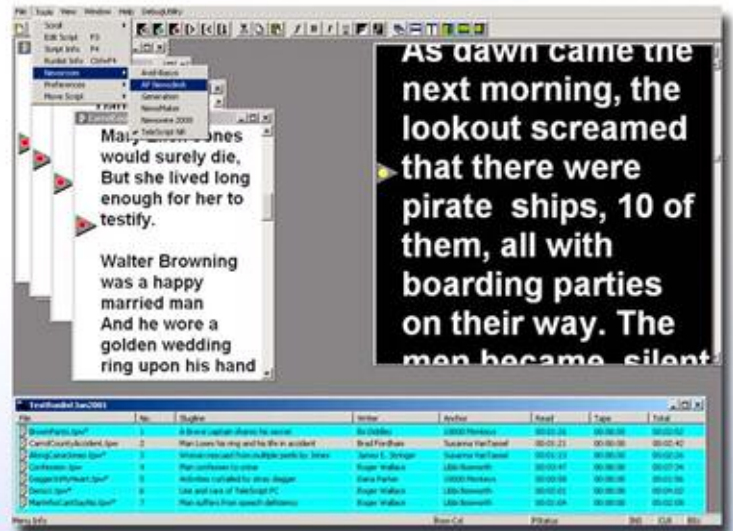

TeleScriptPRO™

TeleScriptPRO™ is Telescript's answer for the hi-tech professional prompting environments that demand mission critical reliability. The only professional prompting program specifically built for Windows 2000/XP. TeleScriptPRO combines an intuitive, easy to use interface with the advanced run order list management and edit-while-prompt features required in the most demanding situations. Full Unicode compliance for all languages (international character sets), and smooth scrolling with Telescript's 10-button serial hand control are standard.

TeleScriptPRO works with industry standard hardware and no special proprietary cards are required. So, if you are involved in live television, corporate staging events or video production, then this is the easy, professional and reliable solution for your teleprompting needs.

Features

- Robust feature set
- Uses RTF and TPW File Format
- Familiar and Efficient User Interface
- Full Screen, Point and Click Editing
- Full Rich Text formatting
- Unique Text Zooming
- Variable Font Size, Colour & Style
- Bookmarks, Find and Replace, Spell Check, Cut, Copy, Paste
- Extensive File & Run order list Management
- Custom screen layout
- 2 screen (prompt while edit) setup available Languages
- Prompt in all International Character Sets
- Fully Unicode compliant

TeleScript Pro-News™ includes a MOS interface for Electronic Newsrooms such as Associated Press (ENPS), Dalet -a.n.n. and Octopus systems.